


IMBA-H810



ATX motherboard supports 22nm LGA 1150 4th generation Intel® Core™ i7/i5/i3, Pentium® and Celeron® CPU with Intel® H81, DDR3, VGA/DVI-D/iDP, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS

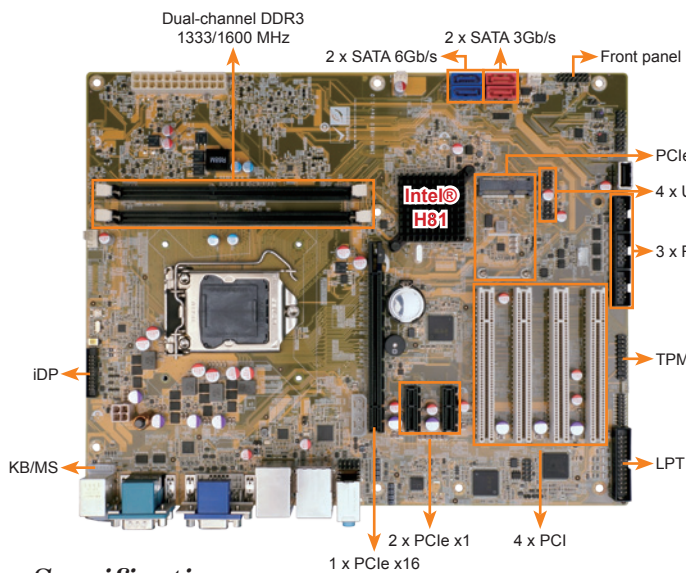

PCIe Mini Add-on Value

IEI USB 3.0 Expanded Solution

The MPCIE-USB3 board can be installed to add two additional SuperSpeed USB 3.0 ports for the motherboard via the PCIe Mini slot.

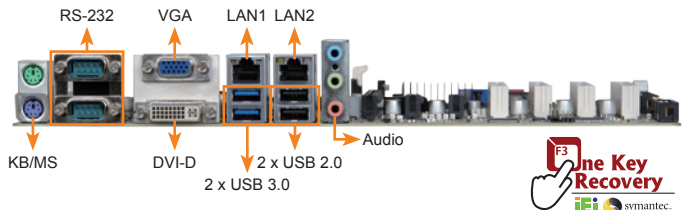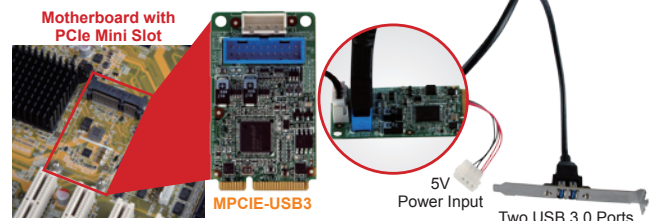

Specifications

- ◆ CPU: LGA1150 Intel® Core™ i7/i5/i3, Pentium® and Celeron® processor supported
- ◆ Chipset: Intel® H81
- ◆ Memory: Two 240-pin 1600/1333 MHz dual-channel DDR3 SDRAM ECC and non-ECC unbuffered DIMMs support up to 16GB
- ◆ BIOS: UEFI
- ◆ Graphics Engine: Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2 Full MPEG2, VC1, AVC Decode
- ◆ Display Output: Dual independent display
 - 1 x VGA (up to 1920x1200@60 Hz)
 - 1 x DVI-D (up to 2560x1600@60 Hz)
 - 1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60 Hz)
- ◆ Ethernet: LAN1: Intel® I217-LM with Intel® AMT9.0 support
LAN2: Intel® I211-AT PCIe Controller
- ◆ External I/O Interface: 1 x KB/MS, 2 x USB 2.0, 2 x RS-232, 2 x USB 3.0
- ◆ Internal I/O Interface: 1 x KB/MS (1x6 pin), 1 x LPT (2x13 pin), 1 x mSATA (share with SATA4), 1 x RS-422/485 (1x4 pin, P=2.0), 2 x SATA 6Gb/s (SATA1, SATA2) (AHCI supported, no RAID) (Blue)
 - 1 x USB 2.0 (180° Type-A)
 - 2 x SATA 3Gb/s (SATA3, SATA4) (Red)
 - 3 x RS-232 (2x5 pin, P=2.54)
 - 4 x USB 2.0 (2x4 pin, P=2.54)
- ◆ Audio: Realtek ALC662 HD codec supports 5.1-channel
 - 3 x Audio jacks (line-out, line-in, mic-in) on rear IO
 - 1 x Front audio (2x5 pin)
- ◆ Front Panel: 1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED: 2 x LAN LED (1x2 pin)
- ◆ TPM: 1 x TPM (2x10 pin)
- ◆ SMBus: 1 x SMBus (1x4 pin)
- ◆ I²C: 1 x I²C (1x4 pin)
- ◆ Infrared Interface: 1 x Infrared Interface (1x5 pin)
- ◆ Expansion: 1 x Full-size PCIe Mini card slot (support mSATA), 2 x PCIe x1, 1 x PCIe x16, 4 x PCI
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Fan Connector: 1 x CPU smart fan (1x 4 pin), 1 x System fan (1x 3 pin)
- ◆ Chassis Intrusion Detection: 1 x Chassis intrusion connector (1x2 pin)
- ◆ Power Supply: ATX power supply, ATX/AT mode support
- ◆ Power Consumption: 3.3V@0.83A, 5V@2.2A, 12V@3.88A, 5VSB@0.3A (Intel® Core™ i7-4770K 3.90GHz CPU with 8 GB (two 4 GB) 1333 MHz DDR3 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Storage Temperature: -30°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244 mm x 305 mm
- ◆ Weight: GW: 1200g / NW: 700g



Features

- 4th generation LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Dual-channel DDR3 1333/1600 MHz support up to 16 GB
- Intel® HD Graphics technology integrates high-performance graphics and media processing
- USB 3.0, and SATA supported
- TPM V1.2 hardware security function supported by TPM module
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Packing List

| | |
|-------------------------------------|----------------|
| 1 x IMBA-H810 single board computer | |
| 1 x I/O shielding | |
| 2 x SATA cable | 1 x QIG |
| 1 x One Key Recovery CD | 1 x Utility CD |

Ordering Information

| Part No. | Description |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IMBA-H810-R10 | ATX motherboard supports 22nm LGA 1150 4th generation Intel® Core™ i7/i5/i3, Pentium® and Celeron® CPU with Intel® H81, DDR3, VGA/DVI-D/iDP, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS |
| IMBA-H810-ECO-R10 | ATX motherboard supports 22nm LGA 1150 4th generation Intel® Core™ i7/i5/i3, Pentium® and Celeron® CPU with Intel® H81, DDR3, VGA/DVI-D/iDP, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio, ECO packing, RoHS (10 pce/pack) |
| 19800-000049-RS | LPT flat cable, 240mm, P=2.54 |
| 19800-000075-RS | PS/2 KB/MS cable with bracket, 220mm, P=2.0 |
| 19800-010500-200-RS | USB 3.0 cable with bracket, 450mm |
| 19800-020100-100-RS | RS-232 cable with bracket, Dual 10-pin to dual DB-9, 230mm, P=2.54 |
| 32102-000100-200-RS | SATA power cable, MOLEX 5264-4P to SATA15P |
| 32205-001203-100-RS | RS-232 cable with bracket, Dual 10-pin to dual DB-9, 230mm, P=2.54 |
| 32205-003800-200-RS | RS-422/485 cable, 200mm, P=2.0 |
| CF-1156A-RS-R11 | High performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W |
| CF-1156E-R11 | High performance LGA1155/LGA1156 cooler kit, 95W |
| DP-DP-R10 | DisplayPort to DisplayPort converter board (for IEI iDP connector) |
| DP-DVI-R10 | DisplayPort to DVI-D converter board (for IEI iDP connector) |
| DP-HDMI-R10 | DisplayPort to HDMI converter board (for IEI iDP connector) |
| DP-LVDS-R10 | DisplayPort to 24-bit dual-channel LVDS converter board (for IEI iDP connector) |
| DP-VGA-R10 | DisplayPort to VGA converter board (for IEI iDP connector) |
| TPM-IN01-R20 | 20-pin Infineon TPM module, software management tool, firmware v3.17 |