




21260D Series

www.kacer.com

Back Panel

21260D-H26-00 Rear I/O

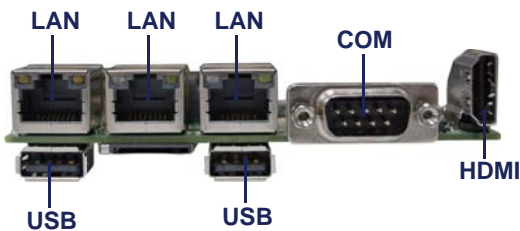

- ▶ Intel® Atom™ N2600 / N2800, 2.5" SBC
Onboard DDR3, VGA, HDMI,
3 x Gb Ethernet, 2 x Mini PCIe, 6 x USB, 2 COM
- ▶ Features
 - Embedded Intel® Atom™ Dual Core processor N2600 / N2800 + Intel NM10
 - Onboard 2GB DDR3
 - Display: VGA & HDMI
 - 3 x Realtek GbE LAN, 6 x USB 2.0, 2 x COM
 - 2 x Mini PCIe (full size & half size)
One full size PCIe Mini card for PCIe / USB interface
One half size PCIe Mini card for mSATA / USB interface

Specification:

| MODEL | 21260D-H26 |
|-----------------------|--|
| CPU Type | Intel Cedarview-M N2600 1.6GHz (Dual core processor) TDP 3.5W Intel Cedarview-M N2800 1.86GHz (Dual core processor) TDP 6.5W |
| MB Chipset | Intel Cedarview-M and NM10 |
| BIOS | Award BIOS |
| Graphics | Intel Cedarview-M Integrated Graphics chipset, N2600 400 MHz render clock frequency Support DirectX* 10.1 compliant Pixel Shader* v2.0 and OGL 3.0, Display Ports: HDMI or CRT |
| System Memory | On board DDR3 SDRAM 2GB, N2600 Memory DDR3 data transfer rate of 800MT/s On board DDR3 SDRAM 4GB, N2800 Memory DDR3 data transfer rate of 1066MT/s |
| NAND flash memory | On board SSD 2 / 4 / 8 / 16 / 32 / 64 GBytes (option) |
| SATA | One SATA port with independent DMA operation supported mSATA share with mini PCIe (option) |
| HDMI | 1 x HDMI support resolution up to 1920 x 1200 |
| Audio | Intel High Definition Audio Specification, Support Line-out / Line-in / Mic-in (Optional / internal) |
| LAN | 3 x Realtek RTL8111F 10 / 100 / 1000 Mbps |
| IO Function | 1 x RS232 or 422 / 485 (external) optional with VGA port , 1 x RS232 or 422 / 485 (internal) |
| USB | 6 x USB 2.0 (2 external + 4 internal) |
| DIO & WDT | Hardware digital Input & Output, 4 x DI / 4 x DO (Option) Hardware Watch Dog Timer, 0~255 sec programmable (Option) |
| Expansion Interface | One 3G SIM card socket 2 x Mini PCIe (full size & half size) One full size PCIe Mini card for PCIe / USB interface One half size PCIe Mini card for mSATA / USB interface |
| Power | On board DC +12V |
| Dimension | 102 x 73 mm (2.5 inch) |
| Operation Temperature | 0 ~ 70°C |
| Operation Humidity | 5 ~ 95%, non-condensing |