




21385S Series

www.kacer.com

Back Panel

21385S Rear I/O

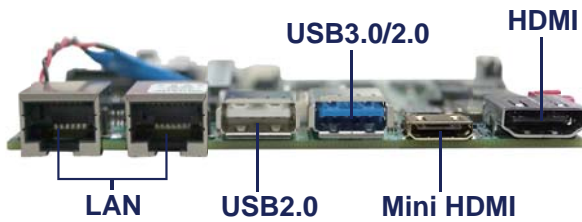

- ▶ Intel® Bay Trail-D J1900 CPU, Pico-ITX 2.5" SBC, On Board DDR3L Memory, 2 x HDMI, 2 x Gb Intel Ethernet, 2 x Mini PCIe, 3 x USB

▶ Features

- Embedded Intel® Bay Trail-D J1900 CPU / chipset
- On Board 2G DDR3L, 1 x HDMI, 1 x Mini HDMI, HD Audio
- 2 x Intel GbE LAN, 1 x Micro USB 2.0, 1 x USB 2.0, 1 x USB 3.0 / 2.0
- 2 x Mini PCIe

Specification:

MODEL	21385S
CPU Type	Bay Trail-D J1900 2.0GHz (Quad core processor)
MB Chipset	Bay Trail-D J1900 chipset
BIOS	Insyde UEFI BIOS
Graphics	Intel's 7th generation (Gen 7) graphics and media encode / decode engine, Supports DX*11, OpenGL 3.0 (OGL 3.0), OpenCL 1.2 (OCL 1.2), Open GLES 2.0
System Memory	On Board 2G DDR3L 1333 MHz
SATA	1 x SATA ports 2.0 Data transfer rates up to 3.0 Gb/s (300 MB/s) (Option)
HDMI	1 x HDMI 1.3a (Type A 19 Pin) 1 x Mini HDMI 1.3a (Type C 19 Pin)
Audio	High Definition Audio Specification, Support Line-out / Mic-in
LAN	2 x Intel I211AT 10 / 100 / 1000 Mbps
USB	1 x USB 3.0 / 2.0 external, 1 x USB 2.0 external 1 x Micro USB 2.0 external
WDT	Hardware Watch Dog Timer, 0~255 sec programmable
Expansion Interface	1 x Full size Mini card for Auto detect PCIe & mSATA and USB interface 1 x Half size Mini card for mSATA and USB interface (Share Micro USB)
Power	DC-In +12V ; Wide Range DC-In +9~36V (option)
Dimension	Pico-ITX 102 x 73 mm (2.5 inch)
Operation Temperature	-20°C ~ 70°C
Operation Humidity	5 ~ 95%, non-condensing