

## DESCRIPTION

FSP600-80PSA is an industrial level of switching power supply. The power supply comes to offer the total power capacity up to 600 Watts, and uses unique active PFC (Power Factor Correction) circuit design with its high-load electrical components, makes it to be perfectly used in an industrial environment. In addition, with its full range of input and output electrical features, the power supply is ideally the best choice for server, workstation, communication or any other automation applications to use. The product also complies with the latest safety and EMC standards, which is perfectly to meet various regulations worldwide.



## APPLICATION

For standard, advanced workstation, server and industrial power system.

## FEATURES

- 85 Plus Bronze
- Low Ripple & Noise
- Output over voltage protection
- Short circuit protection on all outputs
- Resettable power shut down
- INTERNAL 4 cm fan 100% burn-in under high ambient temperature(50°C)
- Vacuum-impregnated transformer
- MTBF:100K hours at 25°C
- 100% Hi-pot tested Line input fuse protection

## WATTAGE

**Wattage:** 600W

## DIMENSION

**Dimension:** 140mm(L) x 150mm(W) x 86mm(H)

## PRODUCT HIGHLIGHT

**Efficiency Level:** 80 Plus Bronze  
**Altitude:** 2000M  
**PMBus:** For standard, advanced workstation, server and industrial power system.

## INPUT SPECIFICATION

**Input Range:** 90-264 Vac  
**Input Frequency:** 47-63 Hz  
**Input Current:** 115V@ 10.0 Amps-rms maximum  
 230V@ 5.0 Amps-rms maximum

## GENERAL SPECIFICATION

**Efficiency:** 85% 230VAC  
**Voltage Regulation:** +3.3V, +12V, +5V, +5SB: ±5%  
 -12V: ±10%


### \*Output Voltage and Current Rating

	+3.3V	+5V	+12V1	+12V2	+12V3	+12V4	-12V	+5Vsb
<b>Ripple-Noise(R-P) mV</b>	50mV	50mV	120mV	120mV	120mV	120mV	120mV	50mV
<b>Regulation Load %</b>	±5%	±5%	±5%	±5%	±5%	±5%	±10%	±5%
<b>Output Max.(A)</b>	25A	25A	16A	16A	16A	16A	0.5A	4A
<b>Output Min.(A)</b>	1.5A	1A	1A	1A	1A	0.5A	0A	0.1A

## NOTES

- 5V, 3.3V, 12V, -12V Will gave the regulation to 10% when all load take off.
- Maximum combined current for the 12V outputs shall be 48A
- The +3.3V and +5V total output shall not exceed 150 watts.
- The total output shall not exceed 600 watts

## MECHANICAL SPECIFICATION

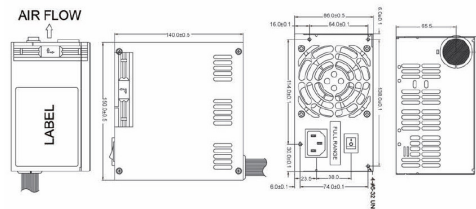

This content is subject to change, please refer to specification for more detail.  
 FSP reserve the right to change the content without prior notice

## SAFETY STANDARD APPROVAL



## OUTPUT SPECIFICATION

**Hold up Time:** 115V/60Hz 16mSec.  
 Minimum@100% Load,  
 230V/50Hz 16mSec.  
**Output Voltage Regulation:** Minimum,@100% Load  
 +3.3Vdc output : +3.9 Vdc  
 minimum, + 4.5Vdc  
 maximum  
 +5Vdc output : +5.7 Vdc  
 minimum, + 6.5Vdc  
 maximum  
 +12Vdc output : +13.3 Vdc  
 minimum, + 16.7Vdc  
 maximum  
**Output Rise Time:** 115V-rms/230V-rms 5V  
 20ms Maximum  
 115V-rms/230V-rms 12V  
 20ms Maximum  
**Ripple & Noise:** 3.3V:50mV p-p  
 5V:50mV p-p  
 12V1:120mV p-p  
 12V2:120mV p-p  
 12V3:120mV p-p  
 12V4:120mV p-p  
 -12V:120mV p-p  
 5Vsb:50mV p-p

## ENVIRONMENTAL SPECIFICATION

**TEMP.Range:** Storage Temperature: -20°C to + 80°C  
**MTBF:** The power supply have a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC inout voltage