




Specification

Model	K1S0025
System	Compact Mini ITX System, C2000 SoC Avoton platform 4* GbE Ethernet w ith dedicatet IPMI w / vKVM over IP
Chassis	KM261 Stylish Black w ith PWR / HDD Led 1* slim DVD+ 2x 2.5" HDD
Mainboard	A1SAi-2550F, C2000 SOC
CPU	C2550 4 Core / 4 Thread 2,4-2,6Ghz
Memory	16GB (2x8) DDR3(L) SODIMM 1600Mhz ECC (max 4* DIMM 64GB max)
Display	BMC integrated Aspeed AST2400 VGA (up to 1920 x 1200 Limited driver of Server OS 2012)
Ethernet	C2000 SoC I354 Quad GbE controllers 10BASE-T, 100BASE-TX, and 1000BASE
Super I/O	AST2400
Rear I/O	1* RS232 DB9, V GA, 4* RJ45 GbE,1* RJ45 Dedicated IPMI LAN port 2* USB 2.0, 2* USB 3.0
on Board	TPM 1.2 header, SMBus I2C Header (4pin), 3* USB3.0 Softw are programmable, support 1~255 sec. system reset
Watch Dog	Screw Lockable Jack 12VDC via 84Watt AC/DC Adapter 90-230V AC
Dimension	W192 x D 261 x H 62 mm (Chassis)
Weight	2,5KG w ithout Pow er Adapter / Mounting Kits

Packing List	1* K1S0025 ITX System, C2550, 2x8GB RAM, 500GB SATA HDD
	1* AD84LM 12V 2pin with Srew Lock Power Adapter 90- 230V AC, EU Power Cord
	1* SCRLC-01 cable
	Wall Mount kits

Wall mount Drawing

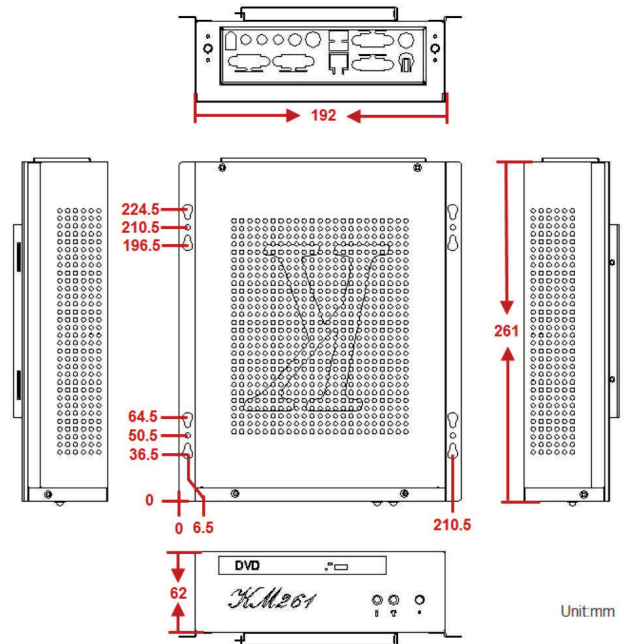

Optional CPU	C2750 8Core 2,4Ghz, Rangeley 2758/2558 4/8 Core (Intel ® QuickAssist Technology)
Optional Parts	VM75100: Vesa Mount kits AVK261, anti-vibration wall mount kit