




## 2I385D Series

[www.kacer.com](http://www.kacer.com)

### 2I385D Rear I/O

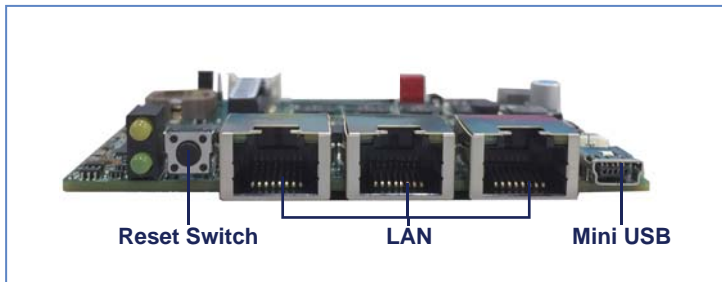

- ▶ Intel® Bay Trail-I E3825 CPU, Super compact SBC, On Board DDR3L Memory, VGA, 2 x USB, 3 x GbE, 1 x Full-size Mini PCIe, (LAN 2 & LAN 3 can be optional to RS485)

#### ▶ Features

- Embedded Intel® Bay Trail-I E3825 CPU / chipset
- On Board 2G / 4G DDR3L, VGA
- 3 x Intel GbE LAN, 1 x mini USB 2.0, 1 x USB 2.0
- 1 x Mini PCIe for mSATA

### Specification:

<b>MODEL</b>	2I385D
<b>CPU Type</b>	Bay Trail-I E3825 1.33 GHz (Dual core processor)
<b>MB Chipset</b>	Intel Bay Trail-I E3825 chipset
<b>BIOS</b>	Insyde UEFI BIOS
<b>Graphics</b>	Intel's 7th generation (Gen 7) graphics and media encode / decode engine, Supports DX*11, OpenGL 3.0 (OGL 3.0), OpenCL 1.2 (OCL 1.2), Open GLES 2.0 Display Ports: VGA
<b>System Memory</b>	On Board 1066 MHz 2Gb DDR3L (4Gb is optional)
<b>LAN</b>	3 x Intel LAN 10 / 100 / 1000 Mbps LAN 2 & LAN 3 could be optional to RS485
<b>USB</b>	1 x mini USB 2.0 (external) 1 x USB 2.0 (internal)
<b>IO function</b>	LAN 2 & LAN 3 could be optional to RS485
<b>Expansion Interface</b>	1 x Full size Mini card for mSATA
<b>Power</b>	Wide Range DC IN +12V~24V
<b>Dimension</b>	75.95 x 90.8 mm
<b>Operation Temperature</b>	-20°C ~ 70°C
<b>Operation Humidity</b>	5 ~ 95%, non-condensing
<b>Chassis</b>	BOX PC: NET-I